

MARVELL® 88SS1322 SSD Controller

PCIe® Gen 4x4, 4-Channel DRAMless High-Performance SSD Controller with NVMe™ 1.3c Interface

PRODUCT OVERVIEW

The Marvell® 88SS1322 enables high performance and high capacity SSDs for use in small form factor applications, for example, cloud data center compute server storage, enterprise boot drives, PC client storage and gaming storage as well as emerging industrial and edge device applications.


Leveraging a tri-core Arm® Cortex® R5 architecture that supports DRAMless operations, the product is ideally suited for m.2 2230, 2242, 2280 SSDs in single and double-sided form factors. It also supports BGA 1113 and BGA1620 FF SSDs. The Marvell 88SS1322 controller supports PCIe Gen 4 and four ONFI and TOGGLE NAND channels operating at up to 1200MT/s, that enable high capacity, high throughput and low latency storage over a wide range of use cases.

The common hardware and firmware controller architecture in 12nm process technology provides the best-in-class electrical and thermal characteristics as well as ultra-low power consumption.

The 88SS1322 leverages the 4th generation of the Marvell NANDEdge™ LDPC engine for extracting the highest level of error correction capability and low-latency read retries and endurance to support next generation TLC and QLC memories.

The SSD controller also supports TCG standards including an AES engine and OTP storage for secure drive configuration.

BLOCK DIAGRAM

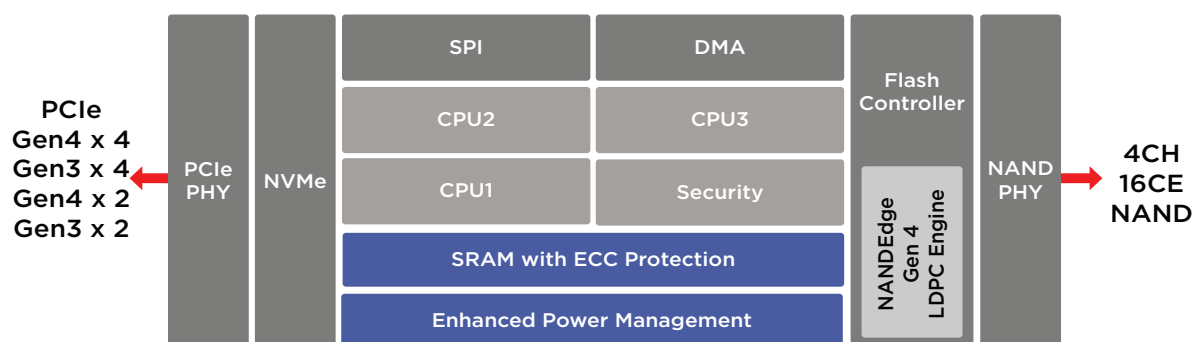

Marvell 88SS1322 SSD Controller

KEY FEATURES AND BENEFITS

FEATURES	BENEFITS
Processor	<ul style="list-style-type: none"> • Tri-Cortex R5 CPUs
Interface	<ul style="list-style-type: none"> • PCIe Gen 4x4; Gen 4x2; Gen 3x4 and Gen 3x2 • 6G SATA
DDR Controller	<ul style="list-style-type: none"> • DRAMless
Flash Controller	<ul style="list-style-type: none"> • 4 Channels @ 1200MT/s • Up to 16 CEs (4CH x 4 CE/Channel) • Compatible with ONFI 2.2/2.3/3.0/4.0/4.1, JEDEC mode and Toggle 1.0/2.0/3.0/4.0 • Hardware RAID • 4th generation of Marvell NANDEdge™ LDPC engine
NVMe	<ul style="list-style-type: none"> • NVMe Standard Revision 1.3c compliance • Supports Host Memory Buffer (HMB) Option
Data Protection & Security	<ul style="list-style-type: none"> • End-to-end data protection • OTP support for secure drive configuration • AES encryption hardware
Temperature Support	<ul style="list-style-type: none"> • 0C to 70C (C-temp) • -40C to 85C (I-temp) • On-Die Temperature Sensor
Performance	<ul style="list-style-type: none"> • 128KB Sequential Read up to 3.9 GB/s • 128KB Sequential Write up to 3.3 GB/s • 4K Random Read up to 500K IOPS • 4K Random Write up to 400K IOPS
Deep Sleep Idle Power	<ul style="list-style-type: none"> • PS4 (L1.2): ~1mW
Package	<ul style="list-style-type: none"> • 8mm x 11mm (234 ball) FC-TFBGA package

TARGET APPLICATIONS

- PC Client
- Gaming
- Industrial
- Data Center
- Enterprise Boot-Drive
DRAMless SSDs

